Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 17 February 2023								
Owner Information								
Owner Name: High Point of Delray West Condominium Association Section 3 Contact Person:								
Addres	s: 5300 Nesting Way			Home Phone:				
City: Delray Beach		Zip: 33484		Work Phone:				
County	Palm Beach			Cell Phone:				
	ce Company:			Policy #:				
Year of	Home: 1984	# of Stories: O	ne	Email:				
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.								
the X 2. Roo OR	a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY)/							
cov	ering identified. 2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	No Information Year of Original Installation or Provided for Replacement Compliance				
	1. Asphalt/Fiberglass Shingle	08/29/2022 Permit # B						
	2. Concrete/Clay Tile	/						
	3. Metal	/						
	4. Built Up	/						
	5. Membrane	//						
	6. Other							
X	A. All roof coverings listed ab installation OR have a roofing B. All roof coverings have a M	ove meet the FBC with a permit application date of	on or after 3/1/02 OR th	e roof is original and built in	n 2004 or later.			
	roofing permit application after							
	C. One or more roof coverings			r "B".				
	D. No roof coverings meet the	_						
3. Roo	by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.							
24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf. C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent Inspectors Initials Property Address 5300 Nesting Way Delray Beach, FL 33484								
mspec	1 Toperty A	uuicss sood Heating W	a, Donay Doubli, I E J	V 1V7				

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 $Page\ 1\ of\ 4$

		or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least 182 psf.
		D. Reinforced Concrete Roof Deck.
		E. Other:
		F. Unknown or unidentified.
		G. No attic access.
4.		of to Wall Attachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within eet of the inside or outside corner of the roof in determination of WEAKEST type)
		A. Toe Nails Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
		☐ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	ъл:.	
	IVIII	nimal conditions to qualify for categories B, C, or D. All visible metal connectors are: Secured to truss/rafter with a minimum of three (3) nails, and
		Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
		B. Clips
		 Metal connectors that do not wrap over the top of the truss/rafter, or Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
	X	C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
		D. Double Wraps
		Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or
		☐ Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
		E. Structural Anchor bolts structurally connected or reinforced concrete roof.F. Other:
		G. Unknown or unidentified
		H. No attic access
5.		of Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
		A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: feet; Total roof system perimeter: feet
		B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft
	X	C. Other Roof Any roof that does not qualify as either (A) or (B) above.
6.		 A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss. B. No SWR.
	X	C. Unknown or undetermined.
In	spec	etors Initials Property Address 5300 Nesting Way Delray Beach, FL 33484
*T	his '	verification form is valid for up to five (5) years provided no material changes have been made to the structure or

Page 2 of 4

inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

	ening Protection Level Chart		Glazed O	Non-Glazed Openings			
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	Χ		Х
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Χ				Х	

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

X in the table above
A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)
• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)
\square B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X

A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or

C. Exterior	Opening	Protection	- Wood S	tructural	Panels	meeting	FBC	2007	All	Glazed	openings	are	covered	with
plywood/OSI	B meeting	the requiren	ents of Tab	ole 1609.1	.2 of the	FBC 2007	7 (Leve	el C in	the t	able abo	ove).			
								_						

C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above



in the table above

Inspectors Initials Property Address 5300 Nesting Way Delray Beach, FL 33484

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter's protective coverings not meeting the requirements of All States of All Stat	nswer "A", "B", or C" or sys						
with no documentation of compliance (Level N in the ta	· ·						
 □ N.1 All Non-Glazed openings classified as Level A, B, C, o □ N.2 One or More Non-Glazed openings classified as Level 							
table above	137 1 4 4 11 1						
 N.3 One or More Non-Glazed openings is classified as Lev. X. None or Some Glazed Openings One or more Glazed 		evel X ir	the table above.				
MITIGATION INSPECTIONS MUST E Section 627.711(2), Florida Statutes, prov							
Qualified Inspector Name:	License Type:		License or Certificate #:				
Seth A. Ford	Certified General Contr		CGC 062495				
Inspection Company:		Phone:	561.718.7560				
<u>Qualified Inspector – I hold an active license as a</u>	: (check one)						
☐ Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board			er of hours of hurricane mitigation				
☐ Building code inspector certified under Section 468.607, Florida	Statutes.						
M General, building or residential contractor licensed under Section	n 489.111, Florida Statutes.						
Professional engineer licensed under Section 471.015, Florida Se	atutes.						
Professional architect licensed under Section 481.213, Florida Se							
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statute		ns to prop	perly complete a uniform mitigation				
Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statues, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection. I, Seth A. Ford am a qualified inspector and I personally performed the inspection or (licensed (print name) contractors and professional engineers only) I had my employee (N/A) perform the inspection (print name of inspector) and I agree to be responsible for his/her work Date: 17 February 2023 An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection. Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative. Signature: Date:							
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)							
The definitions on this form are for inspection purposes on as offering protection from hurricanes.			y product or construction feature				
Inspectors Initials Property Address 5300 Nesting Way Delray Beach, FL 33484							
*This verification form is valid for up to five (5) years provinaccuracies found on the form.	ided no material changes l	ave bee	n made to the structure or				
OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155			Page 4 of 4				



1. Address



2. Roof Covering – Asphalt Shingles



3. Roof Deck Attachment – 19/32" Plywood



3. Roof Deck Attachment – Trusses at 24" O. C. Max.



3. Roof Deck Attachment – 8d Nails



3. Roof Deck Attachment – Fasteners at 6" O. C. Max. In the Field



4. Roof to Wall Attachment – Single Wraps – Steel Straps w/ 2 Nails Min. at Face



4. Roof to Wall Attachment – Single Wraps – Steel Straps w/ 1 Nail Min. at Back



5. Roof Geometry – Front Elevation – Non-Hip



5. Roof Geometry – Left Elevation – Hip




5. Roof Geometry – Rear Elevation – Hip



5. Roof Geometry – Right Elevation – Hip



7. Opening Protection – Unrated Unprotected Windows

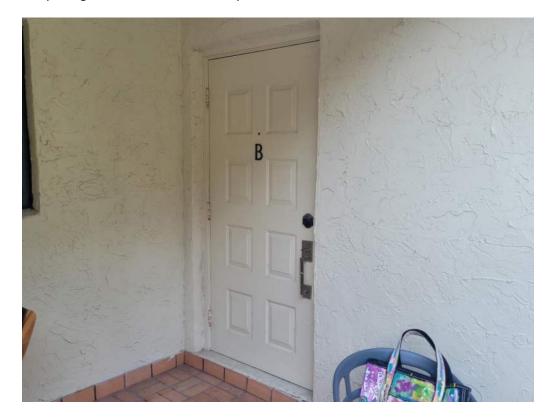

7. Opening Protection – Unprotected Unrated Unglazed Entry Door