## **Uniform Mitigation Verification Inspection Form**

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 17 February 2023						
Owner Information						
Owner Name: High Point of Delray West Condominium Association Section 3 Contact Person:						
Address: 14110 Nesting Way Home Phone:						
City: Delray Beach Zip: 33484 Work Phone:						
County: Palm Beach Cell Phone:						
Insurance Company: Policy #:						
Year of Home: 1982 # of Stories: One Email:						
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.						
<ul> <li>Building Code: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?</li> <li>A. Built in compliance with the FBC: Year Built For homes built in 2002/2003 provide a permit application with a date after 3/1/2002: Building Permit Application Date (MMDD/YYYY)//</li></ul>						
Permit Application FBC or MDC Year of Original Installation or Pr	Information rovided for compliance					
2. Concrete/Clay Tile						
3. Metal						
☐ 4. Built Up						
6. Other						
A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current a installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 200						
□ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the H roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.						
<ul> <li>C. One or more roof coverings do not meet the requirements of Answer "A" or "B".</li> <li>D. No roof coverings meet the requirements of Answer "A" or "B".</li> </ul>	· · · · · · · · · · · · · · · · · · ·					
3. <b>Roof Deck Attachment</b> : What is the <u>weakest</u> form of roof deck attachment?						
A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.						
B. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails space a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.						
C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groov decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent.						
Inspectors Initials Property Address 14110 Nesting Way Delray Beach, FL 33484						

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4

		or greater res	sistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least	
	☐ D. Reinforced Concrete Roof Deck.			
	П			
	П		or unidentified.	
		G. No attic a		
4				
4.			tachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within le or outside corner of the roof in determination of WEAKEST type)	
		A. Toe Nails	$\mathbf{S}$	
			Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or	
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D	
	Miı	nimal conditio	ons to qualify for categories B, C, or D. All visible metal connectors are:	
		X	Secured to truss/rafter with a minimum of three (3) nails, and	
		X	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter <b>and</b> blocked no more than 1.5" of the truss/rafter, <b>and</b> free of visible severe corrosion.	
		B. Clips		
			Metal connectors that do not wrap over the top of the truss/rafter, or	
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.	
	X	C. Single W		
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.	
		D. Double V	Vraps	
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, <b>or</b>	
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.	
		E. Structural	Anchor bolts structurally connected or reinforced concrete roof.	
		F. Other:		
		G. Unknown	or unidentified	
		H. No attic a	access	
5.			What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).	
		A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.	
		B. Flat Roof	Total length of non-hip features: feet; Total roof system perimeter: feet	
			less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft	
	X	C. Other Roo	of Any roof that does not qualify as either (A) or (B) above.	
6.	Sec	A. SWR (also sheathing dwelling	er Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) so called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the gor foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the from water intrusion in the event of roof covering loss.	
	X	B. No SWR.	or undetermined.	
Ind			Property Address 14110 Nesting Way Delray Beach, FL 33484	
441)	pec	vors amudis	Table of Address 14110 Housing Hay Deliay Beach, 1 E 30404	
*Т	hia .	vanification fo	own is valid for up to five (5) years provided no material changes have been made to the structure or	

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart		Glazed Openings				Non-Glazed Openings	
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Galage   a   Glass		Entry Doors	Garage Doors		
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	Χ		Х
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Х				Х	

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

X in the table above
A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)
• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)
$\square$ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X

A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or

$\square$ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above				
	C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with			
	plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).			
	☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist			

C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above



in the table above


Inspectors Initials Property Address 14110 Nesting Way Delray Beach, FL 33484

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter s protective coverings not meeting the requirements of Ar	nswer "A", "B", or C" or sys					
with no documentation of compliance (Level N in the table above).						
	=					
□ N.3 One or More Non-Glazed openings is classified as Leve	el X in the table above					
X. None or Some Glazed Openings One or more Glazed		evel X ir	n the table above.			
MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi						
Qualified Inspector Name:	License Type:		License or Certificate #:			
Seth A. Ford Inspection Company:	Certified General Contr	Phone:	CGC 062495			
			561.718.7560			
Qualified Inspector – I hold an active license as a	: (check one)					
Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board	es who has completed the statut		er of hours of hurricane mitigation			
☐ Building code inspector certified under Section 468.607, Florida	Statutes.					
🛚 General, building or residential contractor licensed under Section	489.111, Florida Statutes.					
☐ Professional engineer licensed under Section 471.015, Florida St	atutes.					
☐ Professional architect licensed under Section 481.213, Florida St	atutes.					
Any other individual or entity recognized by the insurer as posse verification form pursuant to Section 627.711(2), Florida Statute		ns to prop	perly complete a uniform mitigation			
Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statues, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection.  I, Seth A. Ford am a qualified inspector and I personally performed the inspection or (licensed (print name)  contractors and professional engineers only) I had my employee ( N/A ) perform the inspection (print name of inspector)  and I agree to be responsible for his/her wirk Date: 17 February 2023   An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection.    Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.  Signature: Date: Date:						
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)						
The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.						
Inspectors Initials Property Address 14110 Nesting Way Delray Beach, FL 33484						
*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.						
OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155			Page 4 of 4			



## 1. Address

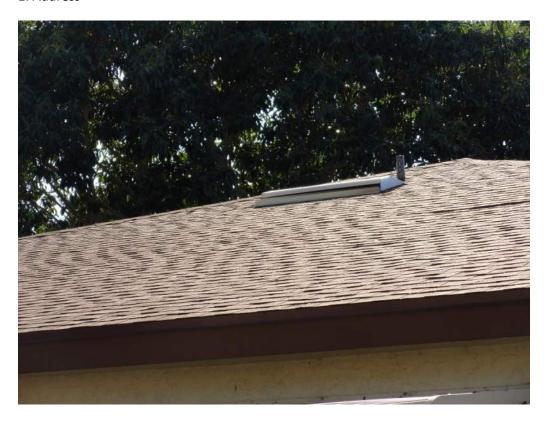

2. Roof Covering – Asphalt Shingles



3. Roof Deck Attachment – 5/8" Plywood



3. Roof Deck Attachment – Trusses at 24" O. C. Max.



3. Roof Deck Attachment – 8d Nails



3. Roof Deck Attachment – Fasteners at 6" O. C. Max. In the Field



4. Roof to Wall Attachment – Single Wraps – Steel Straps w/ 2 Nails Min. at Face



4. Roof to Wall Attachment – Single Wraps – Steel Straps w/ 1 Nail Min. at Back



5. Roof Geometry – Front Elevation – Non-Hip



5. Roof Geometry – Left Elevation – Hip




5. Roof Geometry – Rear Elevation – Hip



5. Roof Geometry – Right Elevation – Hip



7. Opening Protection – Unrated Windows Protected w/ Approved Shutters

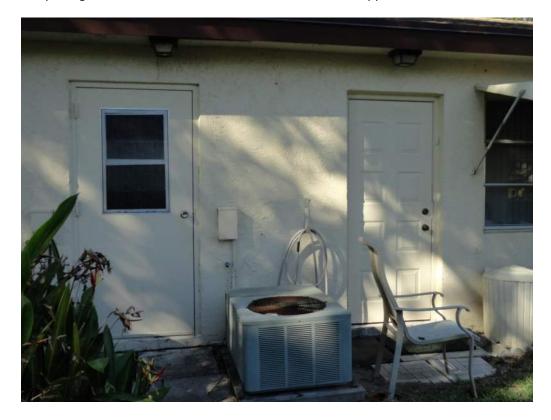

7. Opening Protection – Unprotected Unrated Unglazed Entry Door